

# Generating and ranking of Dyck words

Zoltán Kása

Sapientia – Hungarian University of Transylvania  
Department of Mathematics and Informatics,  
Târgu Mureş  
email: `kasa@ms.sapientia.ro`

**Abstract.** A new algorithms to generate all Dyck words is presented, which is used in ranking and unranking Dyck words. We emphasize the importance of using Dyck words in encoding objects related to Catalan numbers. As a consequence of formulas used in the ranking algorithm we can obtain a recursive formula for the  $n$ th Catalan number.

## 1 Introduction

Let  $B = \{0, 1\}$  be a binary alphabet and  $x_1x_2 \dots x_n \in B^n$ . Let  $h : B \rightarrow \{-1, 1\}$  be a valuation function with  $h(0) = 1$ ,  $h(1) = -1$ , and  $h(x_1x_2 \dots x_n) = \sum_{i=1}^n h(x_i)$ .

A word  $x_1x_2 \dots x_{2n} \in B^{2n}$  is called a *Dyck word* [4] if it satisfy the following conditions:

$$\begin{aligned} h(x_1x_2 \dots x_i) &\geq 0, \text{ for } 1 \leq i \leq 2n - 1 \\ h(x_1x_2 \dots x_{2n}) &= 0. \end{aligned}$$

$n$  is the semilength of the word.

**AMS 2000 subject classifications:** 68R05

**CR Categories and Descriptors:** G.2.1. [Combinatorics]: Subtopic - Combinatorial algorithms.

**Key words and phrases:** Dyck words, generating and ranking algorithms, Catalan numbers

## 2 Lexicographic order

The algorithm that generates all Dyck words in lexicographic order is obvious. Let us begin with 0 in the first position, and add 0 or 1 each time the Dyck-property remains valid. In the following algorithm  $2n$  is the length of a Dyck word,  $n_0$  counts the 0s, and  $n_1$  the 1s.

There are the following cases :

Case 1: ( $n_0 < n$ ) and ( $n_1 < n$ ) and ( $n_0 > n_1$ ) (We can continue by adding 0 and 1.)

Case 2: ( $n_0 < n$ ) and ( $n_1 < n$ ) and ( $n_0 = n_1$ ) (We can continue by adding 0 only.)

Case 3: ( $n_0 < n$ ) and ( $n_1 = n$ ) (We can continue by adding 0 only.)

Case 4: ( $n_0 = n$ ) and ( $n_1 < n$ ) (We can continue by adding 1 only.)

Case 5: ( $n_0 = n_1 = n$ ) (A Dyck word is obtained.)

Let us use the following short notations:

*Dyck 0* for

$x_i := 0$

$n_0 := n_0 + 1$

$\text{LEXDYCKWORDS}(X, i, n_0, n_1)$

$n_0 := n_0 - 1$

*Dyck 1* for

$x_i := 1$

$n_1 := n_1 + 1$

$\text{LEXDYCKWORDS}(X, i, n_0, n_1)$

$n_1 := n_1 - 1$

The algorithm is the following:

$\text{LEXDYCKWORDS}(X, i, n_0, n_1)$

```

1  if Case 1
2    then  $i := i + 1$ 
3        Dyck 0
4        Dyck 1
5  if Case 2 or Case3
6    then  $i := i + 1$ 
7        Dyck 0
8  if Case 4
9    then  $i := i + 1$ 
10     Dyck 1
11 if Case 5
12   then Visit  $x_1 x_2 \dots x_n$ 
13 return
```

The recursive call:

$x_1 = 0, n_0 := 1, n_1 := 0$

$\text{LEXDYCKWORDS}(X, 1, n_0, n_1)$

For  $n = 4$  the following result:

00001111, 00010111, 00011011, 00011101, 00100111, 00101011, 00101101,  
00110011, 00110101, 01000111, 01001011, 01001101, 01010011, 01010101.

This algorithm obviously generates all Dyck words.

### 3 Generating the positions of 1s

Let  $b_1b_2\dots b_n$  be the positions of 1s in the Dyck word  $x_1x_2\dots x_{2n}$ . E.g. for  $x_1x_2\dots x_8 = 01010011$  we have  $b_1b_2b_3b_4 = 2478$ .

To be a Dyck word of semilength  $n$ , the positions  $b_1b_2\dots b_n$  of 1s of the word  $x_1x_2\dots x_{2n}$  must satisfy the following conditions:

$$2i \leq b_i \leq n + i, \quad \text{for } 1 \leq i \leq n.$$

Following the idea of generating combinations by positions of 0s in the corresponding binary string [5] we propose a similar algorithm that generates the positions  $b_1b_2\dots b_n$  of 1s.

PosDYCKWORDS( $n$ )

```

1  for i := 1 to n
2      do  $b_i := 2i$ 
3  repeat
4      Visit  $b_1b_2\dots b_n$ 
5      IND := 0
6      for i := n - 1 downto 1
7          do if  $b_i < n + i$ 
8              then  $b_i := b_i + 1$ 
9                  for j := i + 1 to n - 1
10                      do  $b_j := \max(b_{j-1} + 1, 2j)$ 
11                      IND := 1
12                      break (for)
13  until IND = 0
14  return
```

For  $n = 4$  the following result:

2468, 2478, 2568, 2578, 2678, 3468, 3478, 3568, 3578, 3678, 4568, 4578, 4678,  
5678

The corresponding Dyck words are:

01010101, 01010011, 01001101, 01001011, 01000111, 00110101, 00110011,  
00101101, 00101011, 00100111, 00011101, 00011011, 00010111, 00001111

Because all values of positions that are possible are taken by the algorithm, it generates all Dyck words. Words are generated in reverse lexicographic order.

## 4 Generating by changing 10 in 01

The basic idea [2] is to change the first occurrence of 10 in 01 to get a new Dyck word. We begin with  $0101 \dots 01$ .

Let us denote by  $X$  the Dyck word  $x_1x_2 \dots x_{2n}$ .

```

DYCKWORDS(X, k)
1  i := k
2  while i < 2n
3      do Let j be the position of the first occurrence of 10 in  $x_i x_{i+1} \dots x_{2n}$ ,
        or 0 if such a position doesn't exist.
4      if j > 0
5          then Let Y := X
6              Change  $y_i$  with  $y_{i+1}$ .
7              Visit  $y_1 y_2 \dots y_{2n}$ 
8              DYCKWORDS(Y, j + 1)
9              i := j + 2
10 return

```

The first call is  $\text{DYCKWORDS}(X, 1)$ , if  $X = 0101 \dots 01$ .

For  $X = 01010101$ , the algorithm generates:

01010101, 00110101, 00101101, 00011101, 00011011, 00010111, 00001111,  
00101011, 00100111, 00110011, 01001101, 01001011, 01000111, 01010011.

Can this algorithm always generate all Dyck words? To prove this we show that any Dyck word can be transformed to  $(01)^n$  by several changing of 01 in 10. Let us consider the leftmost subword of the form  $0^i 1$ , for  $i > 0$ . Changing 01 in 10  $(i - 1)$  times, we will obtain a leftmost subword of the form  $0^{i-1} 1$ . So, all subwords of this form can be avoided.

## 5 Ranking Dyck words

Ranking Dyck words means [6] to determine the position of a Dyck word in a given ordered sequence of all Dyck words.

Algorithm POSDYCKWORDS generates all Dyck word in reverse lexicographic order. For ranking these words we will use the following function [7], where  $f(i, j)$  represents the number of paths between  $(0, 0)$  and  $(i, j)$  not crossing the diagonal  $x = y$  of the grid.

$$f(i, j) = \begin{cases} 1, & \text{for } 0 \leq i \leq n, j = 0 \\ f(i-1, j) + f(i, j-1), & \text{for } 1 \leq j < i \leq n \\ f(i, i-1), & \text{for } 1 \leq i = j \leq n \\ 0, & \text{for } 0 \leq i < j \leq n \end{cases} \quad (1)$$

Some values of this function are given in the following table.

|            |   |   |   |    |    |     |     |      |      |                |
|------------|---|---|---|----|----|-----|-----|------|------|----------------|
| 9          |   |   |   |    |    |     |     |      |      | 4862           |
| 8          |   |   |   |    |    |     |     |      | 1430 | 4862           |
| 7          |   |   |   |    |    |     |     | 429  | 1430 | 3432           |
| 6          |   |   |   |    |    | 132 | 429 | 1001 | 2002 |                |
| 5          |   |   |   |    | 42 | 132 | 297 | 572  | 1001 |                |
| 4          |   |   |   | 14 | 42 | 90  | 165 | 275  | 429  |                |
| 3          |   |   | 5 | 14 | 28 | 48  | 75  | 110  | 154  |                |
| 2          |   | 2 | 5 | 9  | 14 | 20  | 27  | 35   | 44   |                |
| 1          | 1 | 2 | 3 | 4  | 5  | 6   | 7   | 8    | 9    |                |
| 0          | 1 | 1 | 1 | 1  | 1  | 1   | 1   | 1    | 1    |                |
| $\uparrow$ | 0 | 1 | 2 | 3  | 4  | 5   | 6   | 7    | 8    | 9              |
| $j$        |   |   |   |    |    |     |     |      |      | $\leftarrow i$ |

It is easy to prove that if  $C_n$  is the  $n$ th Catalan number then

$$C_{n+1} = f(n+1, n) = \sum_{i=0}^n f(n, i), \quad n \geq 0 \quad (2)$$

$$f(n+1, k) = \sum_{i=0}^k f(n, i), \quad n \geq 0, n \geq k \geq 0.$$

Using this function the following ranking algorithm results.

---

```

RANKING( $b_1b_2 \dots b_n$ )
1   $c_1 := 2$ 
2  for  $j := 2$  to  $n$ 
3      do  $c_j := \max(b_{j-1} + 1, 2j)$ 
4   $nr := 1$ 
5  for  $i := 1$  to  $n - 1$ 
6      do for  $j := c_i$  to  $b_i - 1$ 
7          do  $nr := nr + f(n - i, n + i - j)$ 
8  return  $nr$ 

```

For example, if  $b = 4\ 5\ 8\ 9\ 10$ , we get  $c = 2\ 5\ 6\ 9\ 10$ , and  $nr = 1 + f(4, 4) + f(4, 3) + f(2, 2) + f(2, 1) = 1 + 14 + 14 + 2 + 2 = 33$ .

This algorithm can be used for ranking in lexicographic order too.

## 6 Unranking Dyck words

The unranking algorithm for a given  $n$  will map a number between 1 and  $C_n$  to the corresponding Dyck word represented by positions of 1s. Here the Dyck words are considered in reverse lexicographic order too.

```

UNRANKING( $nr$ )
1   $b_0 := 0$ 
2   $nr := nr - 1$ 
3  for  $i := 1$  to  $n$ 
4      do  $b_i := \max(b_{i-1} + 1, 2i)$ 
5           $j := n + i - b_i$ 
6          while ( $nr \geq f(n - i, j)$ ) and ( $b_i < n + i$ )
7              do  $nr := nr - f(n - i, j)$ 
8                   $b_i := b_i + 1$ 
9                   $j := j - 1$ 
10 return  $b_1b_2 \dots b_n$ 

```

If  $n = 6$  and  $nr = 93$ , we will have:  $92 - f(5, 5) - f(5, 4) - f(3, 3) - f(2, 2) - f(1, 1) = 92 - 42 - 42 - 5 - 2 - 1$ , so the corresponding Dyck word represented by positions of 1's is:  $b = 4\ 5\ 7\ 9\ 11\ 12$ . Are changed from the initial values  $2i$  the following: position 1 by 2, position 3 by 1, position 4 by 1 and position 5 by 1.

## 7 Applications of Dyck words

If  $\mathcal{O}$  is a set of  $C_n$  objects, Dyck words can be used for encoding the objects of  $\mathcal{O}$ . The importance of such an encoding currently is not suitably accentuated. We present here an encoding and decoding algorithms for binary trees, based on [1].

*Algorithm for encoding a binary tree*

Let  $B_L$  be the left and  $B_R$  the right subtree of the binary tree  $B$ .  $w01$  means the concatenation of word  $w$  with  $01$ , and  $w$  is considered a global variable.

```
ENCODINGBT(B)
1  if  $B_L \neq \emptyset$  and  $B_R = \emptyset$ 
2    then  $w := w01$ 
3        ENCODINGBT( $B_L$ )
4  if  $B_L = \emptyset$  and  $B_R \neq \emptyset$ 
5    then  $w := w10$ 
6        ENCODINGBT( $B_R$ )
7  if  $B_L \neq \emptyset$  and  $B_R \neq \emptyset$ 
8    then  $w := w00$ 
9        ENCODINGBT( $B_L$ )
8         $w := w11$ 
9        ENCODINGBT ( $B_R$ )
10 return
```

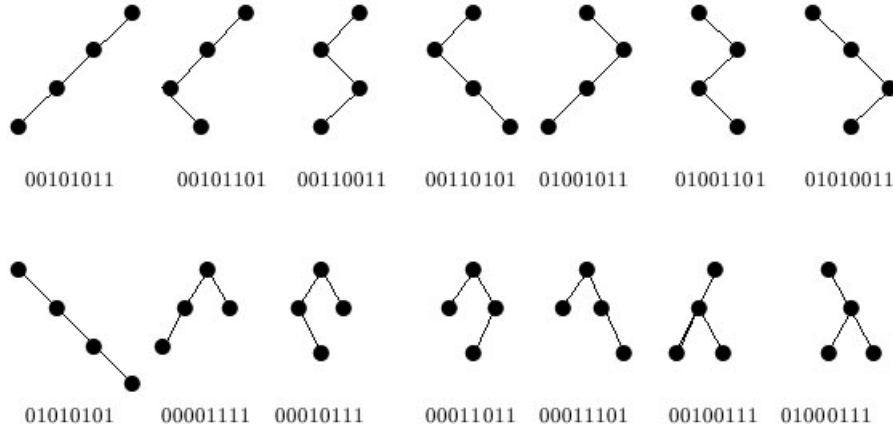
Call:

```
 $w := 0$ 
ENCODINGBT(B)
 $w := w1$ 
```

For all trees of  $n = 4$  vertices the result of the algorithm is given in Fig. 1.

*Algorithm to decode a Dyck word into a binary tree*

At the beginning the root of the generated binary tree is the current vertex. When an edge is drawn, its endvertex becomes the current vertex.

Figure 1: Encoding of binary trees for  $n = 4$ .

DECODINGBT( $w$ )

- 1 Let  $ab$  be the first two letters of  $w$ .
- 2 Delete  $ab$  from  $w$ .
- 3 **if**  $ab = 01$
- 4     **then** draw a left edge from the current vertex
- 5         DECODINGBT( $w$ )
- 6 **if**  $ab = 10$
- 7     **then** draw a right edge from the current vertex
- 8         DECODINGBT( $w$ )
- 9 **if**  $ab = 00$
- 10    **then** put in the stack the position of the current vertex
- 11        draw a left edge from the current vertex
- 12        DECODINGBT( $w$ )
- 13 **if**  $ab = 11$
- 14    **then** get from the stack the position of the new current vertex
- 15        draw a right edge from the current vertex
- 16        DECODINGBT( $w$ )
- 17 **return**

Call:

- delete 0 from the beginning and 1 from the end of the input word  $w$
- draw a vertex (the root of the tree) as current vertex
- DECODINGBT( $w$ )



For some other objects related to Catalan numbers the corresponding coding can be found in [1] and at <http://www.ms.sapientia.ro/~kasa/CodingDyck.pdf>.

## 8 A consequence

As a consequence of formulas (1) and (2) the following formula for the  $(n+1)$ th Catalan number results:

$$C_{n+1} = 1 + \sum_{k \geq 0} (-1)^k \binom{n-k}{k+1} C_{n-k}. \quad (3)$$

We can prove that

$$f(n, n-k) = \sum_{i=0}^n (-1)^i \binom{k-i}{i} C_{n-i}$$

for appropriate  $n$  and  $k$ , using mathematical induction on  $n$  and  $k$ , and formula (1) in the form

$$f(n, n-k) = f(n, n-k+1) - f(n-1, n-k+1).$$

Now, from (2)

$$\begin{aligned} C_{n+1} &= \sum_{i=0}^n f(n, i) = f(n, 0) + \sum_{i=1}^n f(n, i) = 1 + \sum_{i=0}^{n-1} f(n, n-i) \\ &= 1 + \sum_{i=0}^{n-1} \left( \sum_{k=0}^n (-1)^k \binom{i-k}{k} C_{n-k} \right) \\ &= 1 + \sum_{k=0}^n (-1)^k C_{n-k} \left( \sum_{i=0}^{n-1} \binom{i-k}{k} \right) \\ &= 1 + \sum_{k=0}^n (-1)^k \binom{n-k}{k+1} C_{n-k}. \end{aligned}$$

In the last line  $\binom{k}{k} + \binom{k+1}{k} + \dots + \binom{n-1-k}{k} = \binom{n-k}{k+1}$  has been used.

## References

- [1] A. Bege, Z. Kása, Coding objects related to Catalan numbers, *Studia Universitatis Babeş-Bolyai, Informatica* **46**, 1 (2001) 31–40.
- [2] A. Bege, Z. Kása, *Algoritmikus kombinatorika és számelmélet*, Presa Universitară Clujeană, 2006.
- [3] E. Deutsch, Dyck path enumeration, *Discrete Mathematics* **204**, 1–3 (1999) 167–202.
- [4] P. Duchon, On the enumeration and generation of generalized Dyck words, *Discrete Mathematics* **225**, 1–3 (2000) 121–135.
- [5] D. E. Knuth, *The Art of Computer Programming, Vol. 4. Fasc. 3, Generating All Combinations and Partitions*, Addison-Wesley, 2005.
- [6] J. Liebehenschel, Ranking and unranking of lexicographically ordered words: An average-case analysis. *Journal of Automata, Languages and Combinatorics*, **2**, 4 (1997) 227–268
- [7] W. Yang, *Discrete Mathematics*, <http://www.cis.nctu.edu.tw/~wuuyang/>, manuscript.

*Received: November 17, 2008*